


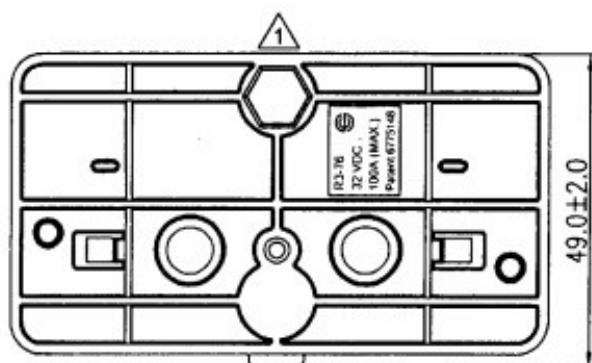
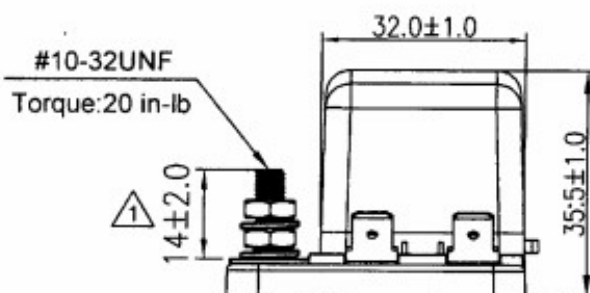
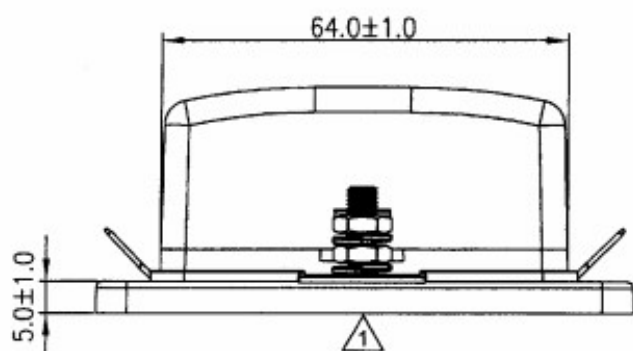
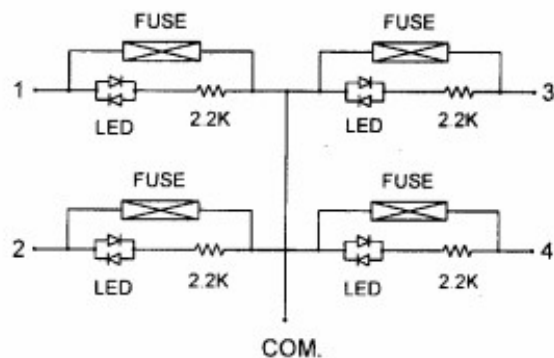


Voltage (Max.)	32 VDC.	Mounting Holes	Blade Fuse Dim.	
Input Terminal Rating	#10-32 threaded studs (100A max.)			
Output Terminal Rating	30A max. per circuit.			
Connection Pad Option Available	Input wire size : #4-6 AWG. Output wire size : #12-16 AWG.	Terminal Dim.		
Fuse Specifications	For Blade Fuses Used Only			
Torque Rating	20 in-lb (2.25Nm) max.	Circuit Diagram		
Mounting Torque Rating	8 in-lb (0.9Nm) max.			
Temperature Rating	-20 °C to 85 °C			

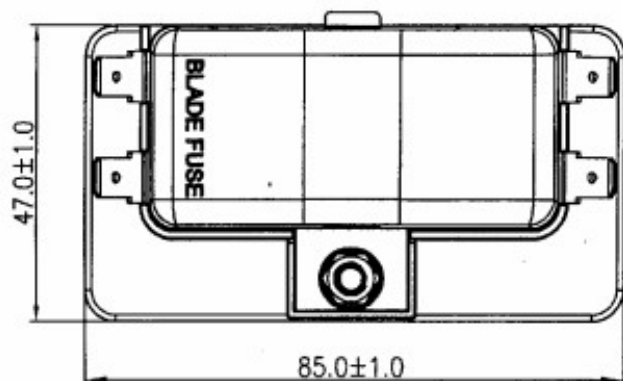

Material :

Cover : PC. (Transparent)
Housing , Base : PBT. (Black)
Push Button : POM. (White)
Terminal : Tin. plating Copper

Notes :

Rating 100A max. tested by
4 pcs. 25A load.