
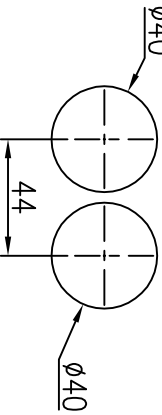
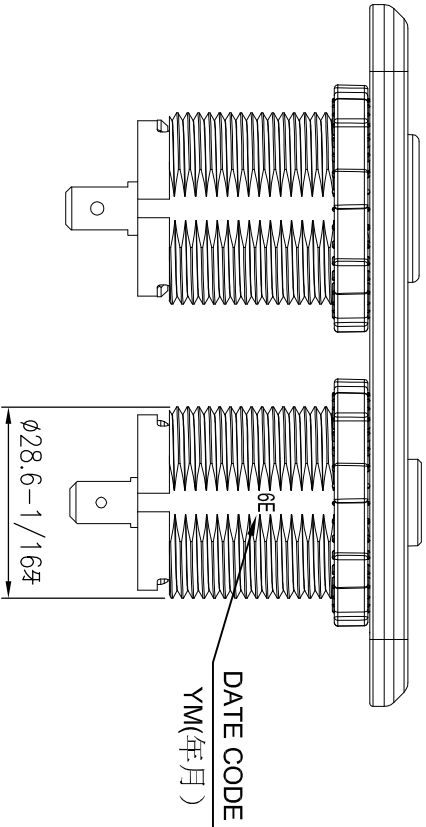


Voltage	A:12V DC B:24V DC	Mounting Hole	
Output	Output A : USB A QC3.0(5V3A/9V2A/12V1.5A) USB C PD(5V3A/9V3A/12V3A) Output B : USB A QC3.0(5V3A/9V2A/12V1.5A) USB C PD(5V3A/9V3A/12V3A/15V3A/20V2.25A) Uses both USB A + C(5V 2.4A+2.4A) Auto Sockets: 20A 12V DC/10A 24V DC		
Max Output Power	45W Max		
Approvals	CE(EN50498)/UKCA		
Operating Temperatures	-30℃~45℃		

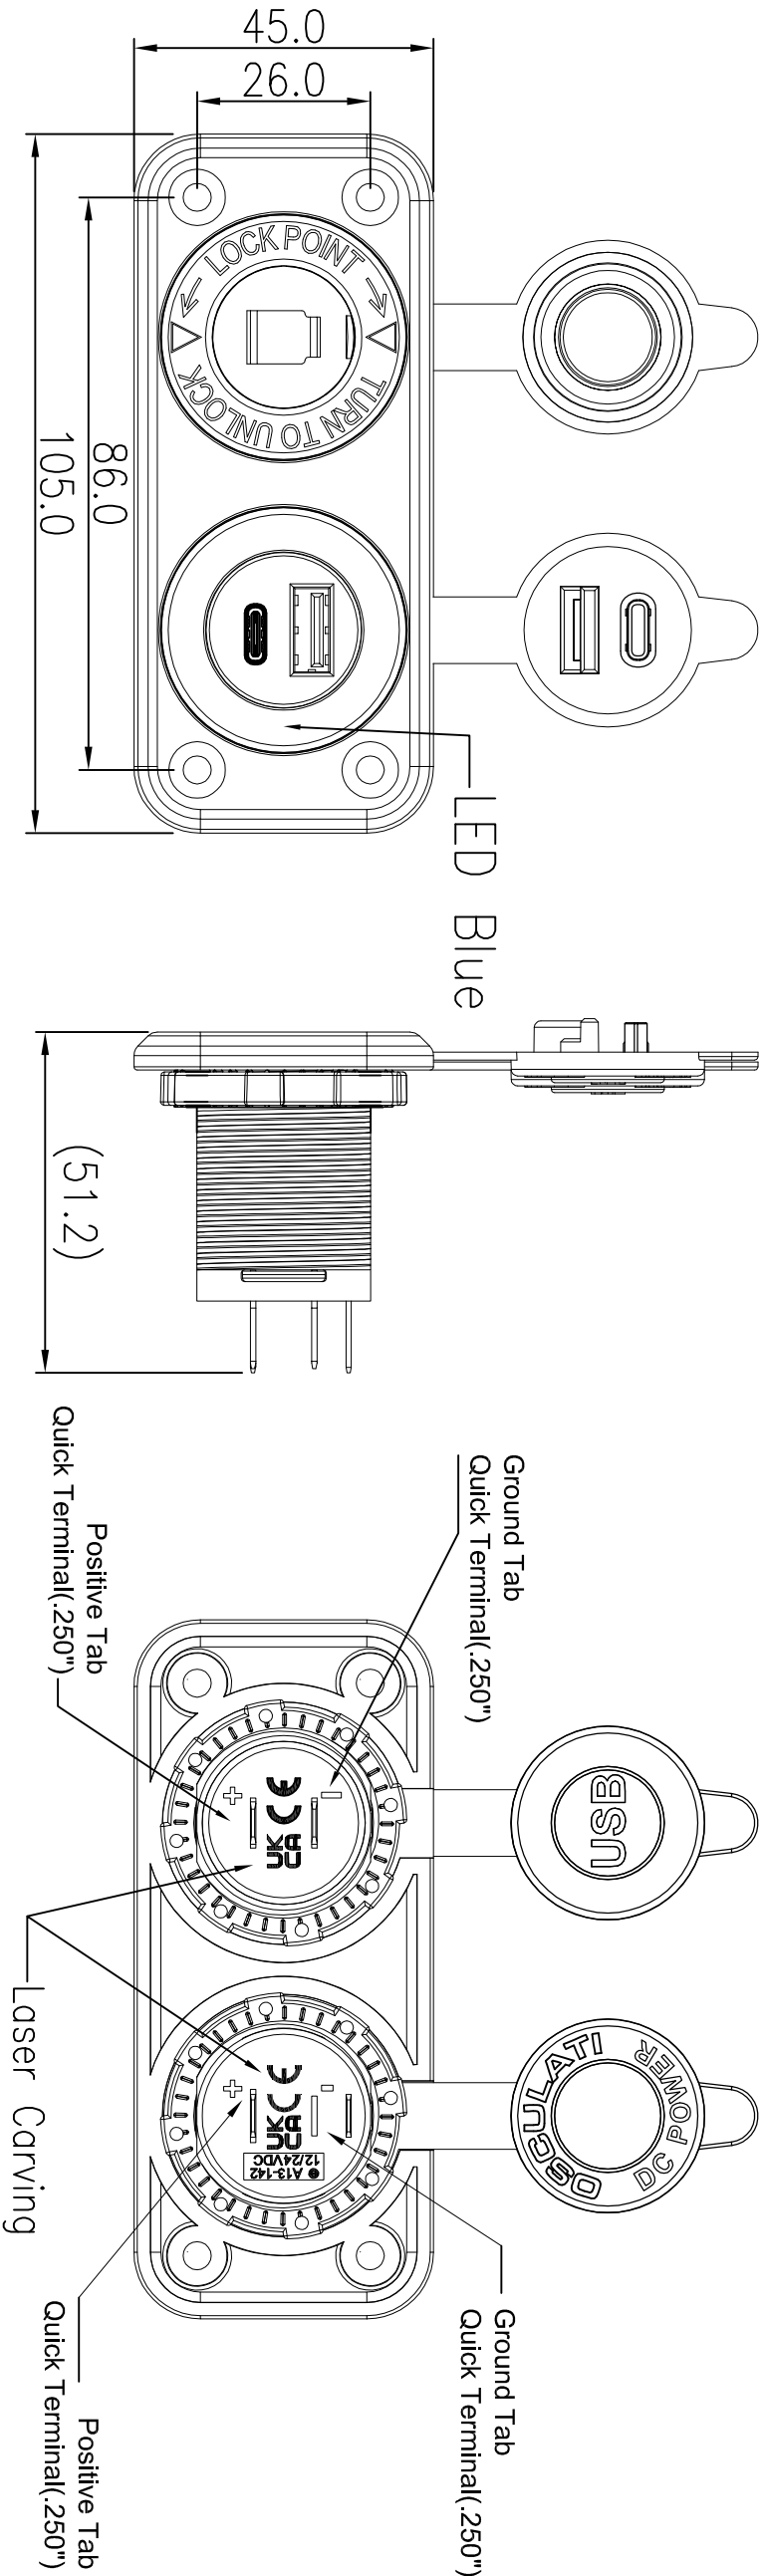

Tolerances ±0.3 Unless Otherwise Specified				
			△	
			△	
Date	Name	Description	No.	